


# The Dynamic Bar achieves superior chip evacuation

High rigidity and chattering resistance are ensured by using a special alloy and with help of stress analysis technology. Previously unattained surface finish and dimensional accuracy are now achieved.




## Comparison of vibration tendency

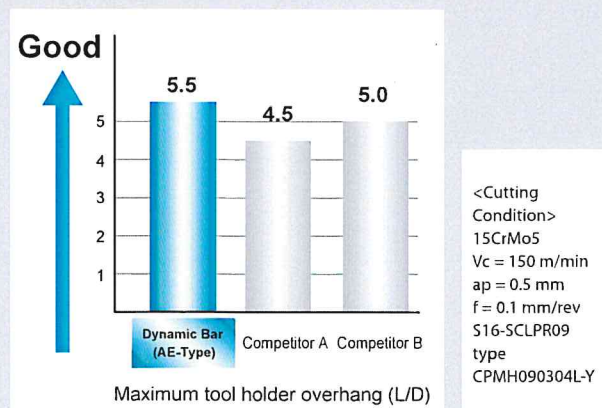

## Comparison of surface finish

Vibration of the Dynamic Bar was minimal even at high cutting speeds, enabling stable machining.

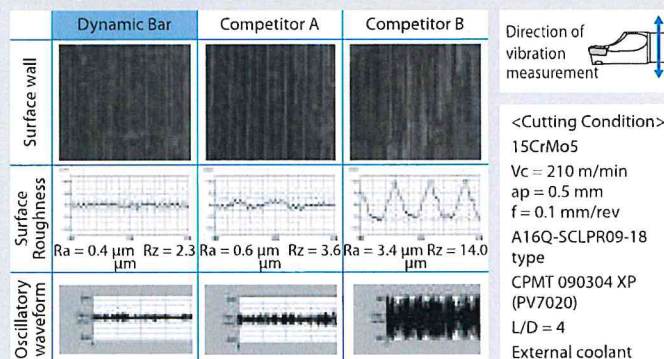

### Set 1 - RH CA515 Steel

1 pcs. A08X SCLCR 06-10AE	10 pcs. <i>KCS 30011</i>	
1 pcs. A10L SCLCR 06-12AE	CCMT 060204 HQ	<b>£195</b>
1 pcs. A12M SCLCR 06-14AE	CA515	

### Set 1 - LH CA515 Steel

1 pcs. A08X SCLCL 06-10AE	10 pcs. <i>KCS 30013</i>	
1 pcs. A10L SCLCL 06-12AE	CCMT 060204 HQ	<b>£195</b>
1 pcs. A12M SCLCL 06-14AE	CA515	

### Set 1 - RH CA6525 Stainless

1 pcs. A08X SCLCR 06-10AE	10 pcs. <i>KCS 30015</i>	
1 pcs. A10L SCLCR 06-12AE	CCMT 060204 HQ	<b>£195</b>
1 pcs. A12M SCLCR 06-14AE	CA6525	

### Set 1 - LH CA6525 Stainless

1 pcs. A08X SCLCL 06-10AE	10 pcs. <i>KCS 30017</i>	
1 pcs. A10L SCLCL 06-12AE	CCMT 060204 HQ	<b>£195</b>
1 pcs. A12M SCLCL 06-14AE	CA6525	

### Set 2 - RH CA515 Steel

1 pcs. A16Q SCLCR 09-18AE	10 pcs. <i>KCS 30012</i>	
1 pcs. A20R SCLCR 09-22AE	CCMT 09T304 HQ	<b>£245</b>
1 pcs. A25S SCLCR 09-27AE	CA515	

### Set 2 - LH CA515 Steel

1 pcs. A16Q SCLCL 09-18AE	10 pcs. <i>KCS 30014</i>	
1 pcs. A20R SCLCL 09-22AE	CCMT 09T304 HQ	<b>£245</b>
1 pcs. A25S SCLCL 09-27AE	CA515	

### Set 2 - RH CA6525 Stainless

1 pcs. A16Q SCLCR 09-18AE	10 pcs. <i>KCS 30016</i>	
1 pcs. A20R SCLCR 09-22AE	CCMT 09T304 HQ	<b>£245</b>
1 pcs. A25S SCLCR 09-27AE	CA6525	

### Set 2 - LH CA6525 Stainless

1 pcs. A16Q SCLCL 09-18AE	10 pcs. <i>KCS 30018</i>	
1 pcs. A20R SCLCL 09-22AE	CCMT 09T304 HQ	<b>£245</b>
1 pcs. A25S SCLCL 09-27AE	CA6525	